

# ComoPex

ΣΩΛΗΝΕΣ & ΕΞΑΡΤΗΜΑΤΑ ΥΔΡΕΥΣΗΣ - ΘΕΡΜΑΝΣΗΣ



Como-Pex

Interplast

Como-pex.

μ (μ )

12167 μ DIN 50930/6 μ



ring

105°

105°



( )

50930/6. 1/2". μ 3/4", 1" μ 1 1/4" μ CW614N 12167 2-12 μ DIN ISO 228. μ



H

Flash Valve

Labor S.A.

Flash Valve "pronybrake",



μ

(season cracking).



ΠΙΣΤΟΠΟΙΗΣΕΙΣ

ISO 9001 TUV μ

PCT ISS μ

MPA-NRW μ

WRAS μ

CSA μ

SKZ μ

PEX MD μ

Como-Pex μ

UNE μ

BS μ

DIN μ

Como-Pex μ

ISO 9001 TUV μ

PCT ISS μ

MPA-NRW μ

WRAS μ

Como-Pex μ

AENOR μ

CSA μ

ZIK μ

PCT μ

interplast Green Line

ΟΛΟΚΛΗΡΩΜΕΝΟ ΠΙΣΤΟΠΟΙΗΜΕΝΟ ΣΥΣΤΗΜΑ



[www.interplast.gr](http://www.interplast.gr)



**ComoPex**  
Σωλήνες & Εξαρτήματα Ύδρευσης - Θέρμανσης

DIY I

· · W r We - & e w y - - r w y - y - e - e - - r - - u e - w y W - r -

7CA CID9L I


· · W r We - & e w y - - r w y - y - e - e - - r - - u e - w y W - r -

I

· · W r We - & e w y - - r w y - y - e - e - - r - - u e - w y W - r -



u e - w y W - y - i y (A C)	- - Y W Y - r ' r - (e - r)	y l e - r	- - W - e W e - - r - y - U y W e i y -
20	50	19,5	1,5
60	50	13	1,5
90	50	9,6	1,5
95	50	8,2	1,5

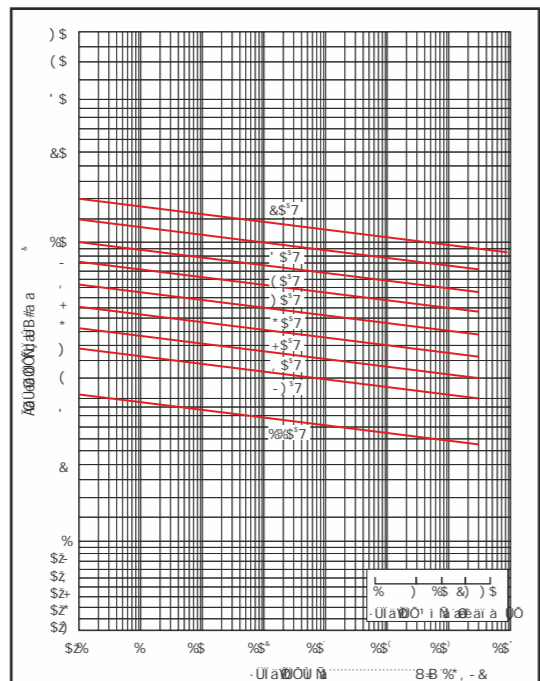

u e - w y W - y - i y (A C)	u e - w y W - y - i y (h)	y l e - r e y W i w r - u y - e i w y W Y W i - w ' W (bar)	y l e - r e y W i w r - C O M O - P E X (bar)
16*2,0	20	1	34,29
	95	1000	12,57
18*2,5	20	1	38,71
	95	1000	14,19

· · W r We - & e w y - - r w y - y - e - e - - r - - u e - w y W - r -

· · W r We - & e w y - - r w y - y - e - e - - r - - u e - w y W - r -

· · W r We - & e w y - - r w y - y - e - e - - r - - u e - w y W - r -

